

Ordering Guide


S7566AC: LUMINAIRE, FINIAL, BLACK (shown)
 Modifications: Cedar tree finial.
 S7566AD: LUMINAIRE, NO FINIAL, BLACK
 S7566AE: LUMINAIRE, FINIAL, GREEN (shown)
 STOCK CODE # 039031514
 Modifications: Cedar tree finial.
 S7566AF: LUMINAIRE, NO FINIAL, GREEN
 STOCK CODE # 039031514

Lumilock LED Specifications:

- 64, 3000K (warm) LEDs, typical 75 Color Rendering Index (CRI), >100,000 hours of operational life (at 25°C ambient temperature & 70% lumen maintenance), injection molded Type 3 Wide optical plates, IP66 rated optical system.
- Integral Advance Xitanium LED driver, class 1, IP66 rated, 350mA, IntelliVolt 120-277 VAC, 50-60Hz, RoHS compliant, field replaceable 10kV/10kA surge suppression.
- Delivered lumens: 9789, Wattage: 69W.

Lumilock Certifications:

- ETL/cETL listed to U.S. & Canadian safety standards for wet locations, manufactured to ISO 9001:2008 Standards, vibration tested to ANSI C136.31 for Normal Applications, UL8750 & UL1598 compliant, LM79 & LM80 tested, DLC listed.

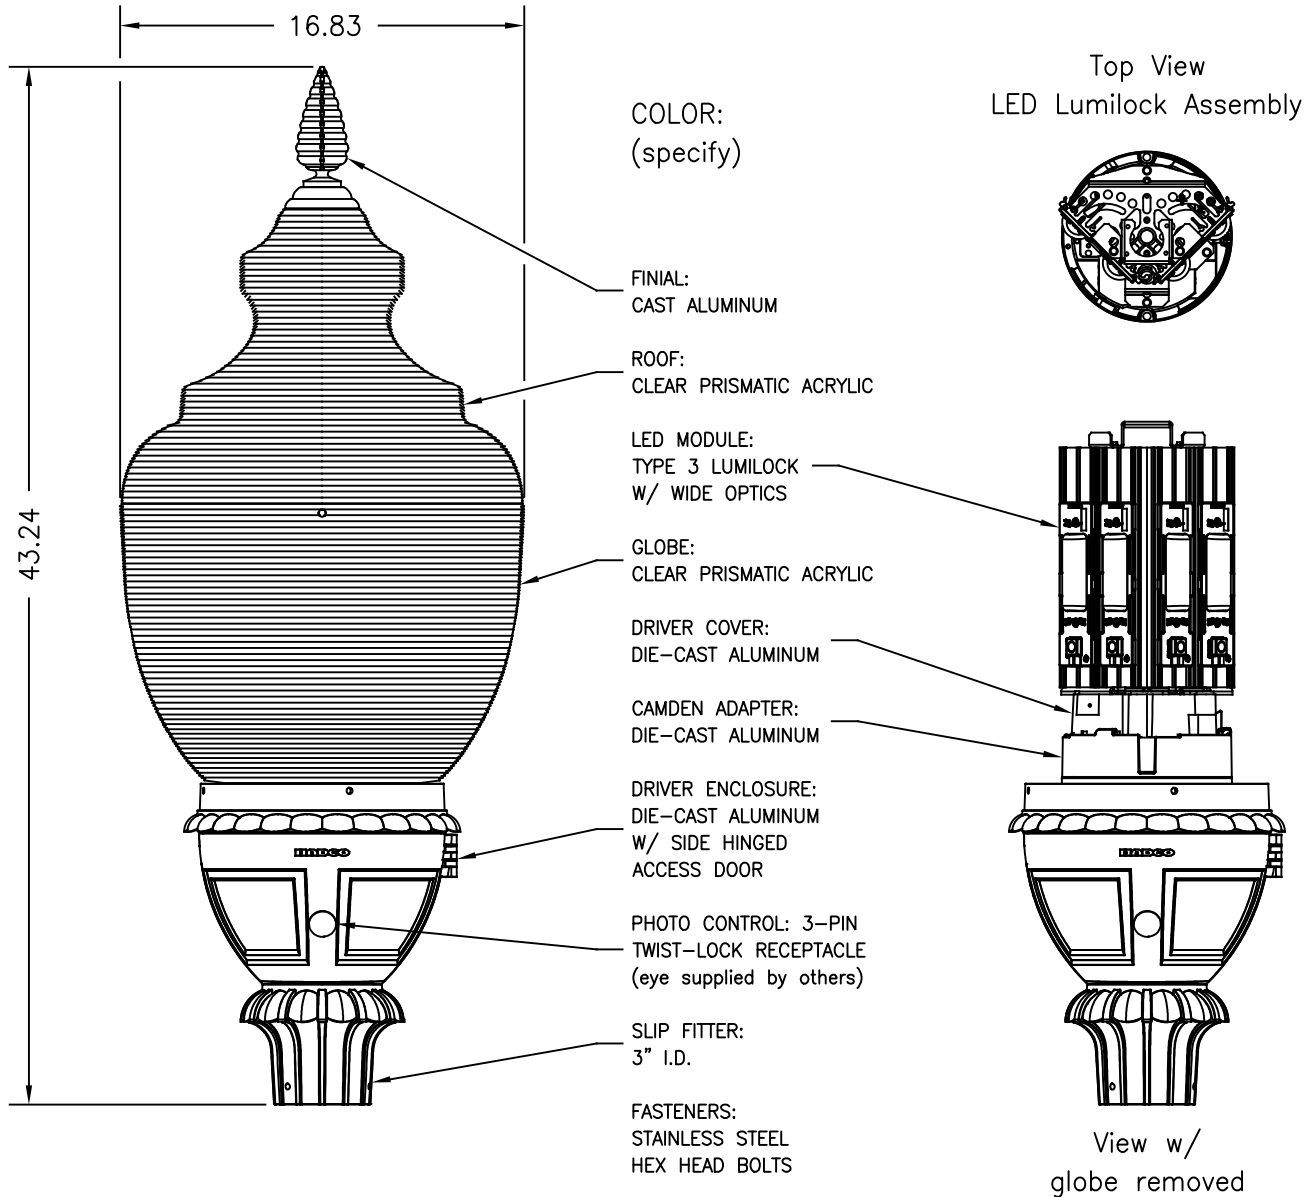

IES File Name:
RL34-A-x-W-3

CONFIDENTIAL:

This drawing is confidential and proprietary to Hadco and may not be reproduced without the express written consent of Hadco. Any use hereof or of any of the information or detail herein shall be for the sole benefit of Hadco.

NOTICE:

This drawing is for reference only. Check for latest revision prior to ordering.

PRODUCT APPROVALS

HADCO

SDK

CUSTOMER

400 Crossing Blvd Suite 600
 Bridgewater, NJ 08807
 www.signify.com

HADCO

JOB NAME:

NOVEC

SCALE:

1:8

DATE:

12/03/18

DRAWN BY:

SMK

DRAWING NUMBER:

S7566-DWG15

REP:

DePorter, Dominick

REV:

C

BY:

SMK

PCN:

26-003

DATE:

03/02/26