

Ordering Guide

S7566AS: LUMINAIRE, FINIAL, BLACK (shown)
STOCK CODE # 039031512

Modifications: FAWS set at position 3,
Cedar tree finial.

S7566BA: LUMINAIRE, FINIAL, BLACK (shown)
Modifications: FAWS set at position 10,
Cedar tree finial.

S7566AT: LUMINAIRE, LESS FINIAL, BLACK

S7566AU: LUMINAIRE, FINIAL, GREEN (shown)
Modifications: Cedar tree finial.

S7566AV: LUMINAIRE, LESS FINIAL, GREEN


Lumilock LED Specifications:

- 64, 3000K (warm) LEDs, typical 75 Color Rendering Index (CRI), >100,000 hours of operational life (at 25°C ambient temperature & 70% lumen maintenance), injection molded Type 3 Short optical plates, IP66 rated optical system.
- Integral Advance Xitanium LED driver, class 1, IP66 rated, 350mA, IntelliVolt 120-277 VAC, 50-60Hz, RoHS compliant, field replaceable 10kV/10kA surge suppression.
- Delivered lumens: 9900, Wattage: 69W.
- Field Adjustable Wattage Switch (FAWS), set at position 3 or 10 (specify), (see chart below for settings).

Lumilock LED Certifications:

- ETL/cETL listed to U.S. & Canada safety standards for wet locations, manufactured to ISO 9001:2008 Standards, vibration tested to ANSI C136.31 for Normal Applications, UL8750 & UL1598 compliant, LM79 & LM80 tested, DLC listed.


COLOR: (specify)

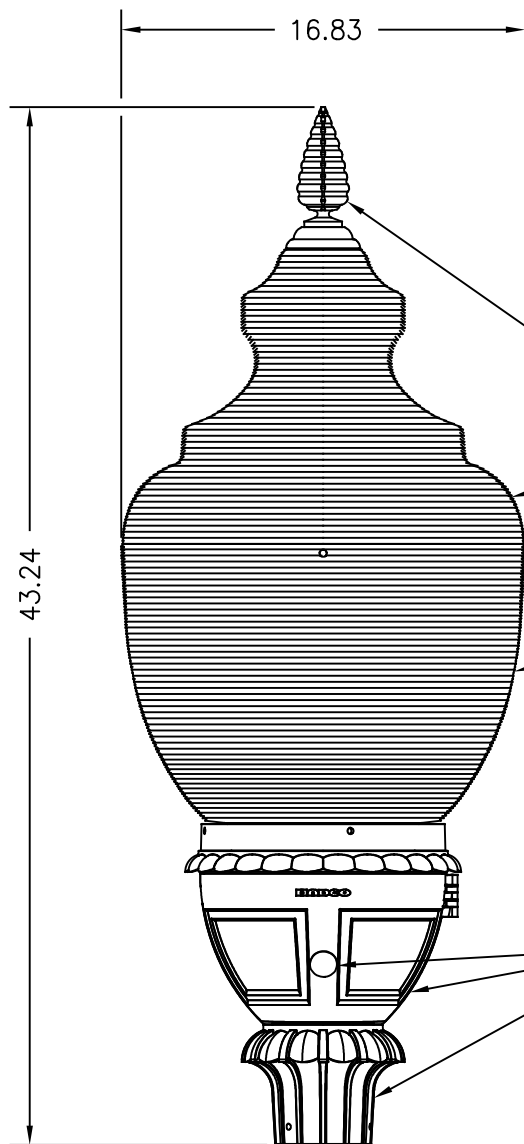

FAWS POSITION	LUMENS	SYSTEM WATTAGE
1	2970	19
2	5247	33
3	6138	39
4	7227	46
5	7722	50
6	8217	54
7	8613	59
8	9009	61
9	9405	64
10	9900	69

Factory set to position 3 or 10 (specify)

Top View
LED Lumilock Assembly



FINIAL: CAST ALUMINUM

ROOF: CLEAR PRISMATIC ACRYLIC

LED MODULE:
TYPE 3 LUMILOCK W/ SHORT OPTICS
(see specification notes)


GLOBE:
CLEAR PRISMATIC ACRYLIC

DRIVER COVER:
DIE-CAST ALUMINUM

CAMDEN ADAPTER:
DIE-CAST ALUMINUM

DRIVER ENCLOSURE:
DIE-CAST ALUMINUM W/
SIDE HINGED ACCESS DOOR,
3-PIN TWIST-LOCK PHOTO
CONTROL RECEPTACLE
(eye supplied by others) &
3" I.D. SLIP FITTER

FASTENERS:
STAINLESS STEEL HEX HEAD BOLTS

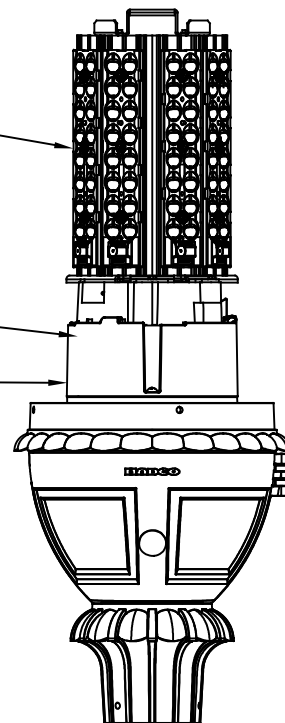

IES File Name:
RL34-A-x-W-3

CONFIDENTIAL:

This drawing is confidential and proprietary to Hadco and may not be reproduced without the express written consent of Hadco. Any use hereof or of any of the information or detail herein shall be for the sole benefit of Hadco.

NOTICE:

This drawing is for reference only. Check for latest revision prior to ordering.

PRODUCT APPROVALS

HADCO

MDS

CUSTOMER

400 Crossing Blvd Suite 600
Bridgewater, NJ 08807
www.signify.com

HADCO

JOB NAME:

NOVEC

SCALE:

1:8

DATE:

05/04/22

DRAWN BY:

SMK

DRAWING NUMBER:

S7566-DWG21

REP:

DePorter, Dominick

REV:

D

PCN:

26-003

BY:

SMK

DATE:

03/02/26