


Ordering Guide

SA7566J: LED RETROFIT ASSY.
Modifications: "Y" can driver,
FAWS set at position 3.

NOVEC Part #
039031013

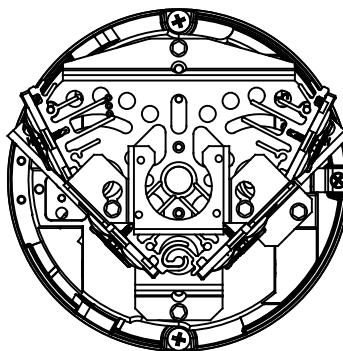

Lumilock LED Specifications:


- 64, 3000K (warm) LEDs, typical 75 Color Rendering Index (CRI), >100,000 hours of operational life (at 25°C ambient temperature & 70% lumen maintenance), injection molded Type 3 Short optical plates, IP66 rated optical system.
- Integral Advance Xitanium LED driver, class 1, IP66 rated, 350mA, 0–10V dimming, IntelliVolt 120–277 VAC, 50–60Hz, RoHS compliant, field replaceable 10kV/10kA surge suppression.
- Delivered lumens: 9900, Wattage: 69W. (numbers based on RL34 globe w/ clear roof).
- Field Adjustable Wattage Switch (FAWS), FAWS set at position 3, (see chart below for settings).

FAWS POSITION	LUMENS	SYSTEM WATTAGE
1	2970	19
2	5247	33
3	6138	39
4	7227	46
5	7722	50
6	8217	54
7	8613	59
8	9009	61
9	9405	64
10	9900	69

Factory set to position 3

Lumilock Certifications:

- UL8750 & UL1598 compliant, ETL/cETL listed to U.S. & Canadian safety standards for wet locations, manufactured to ISO 9001:2008 Standards.

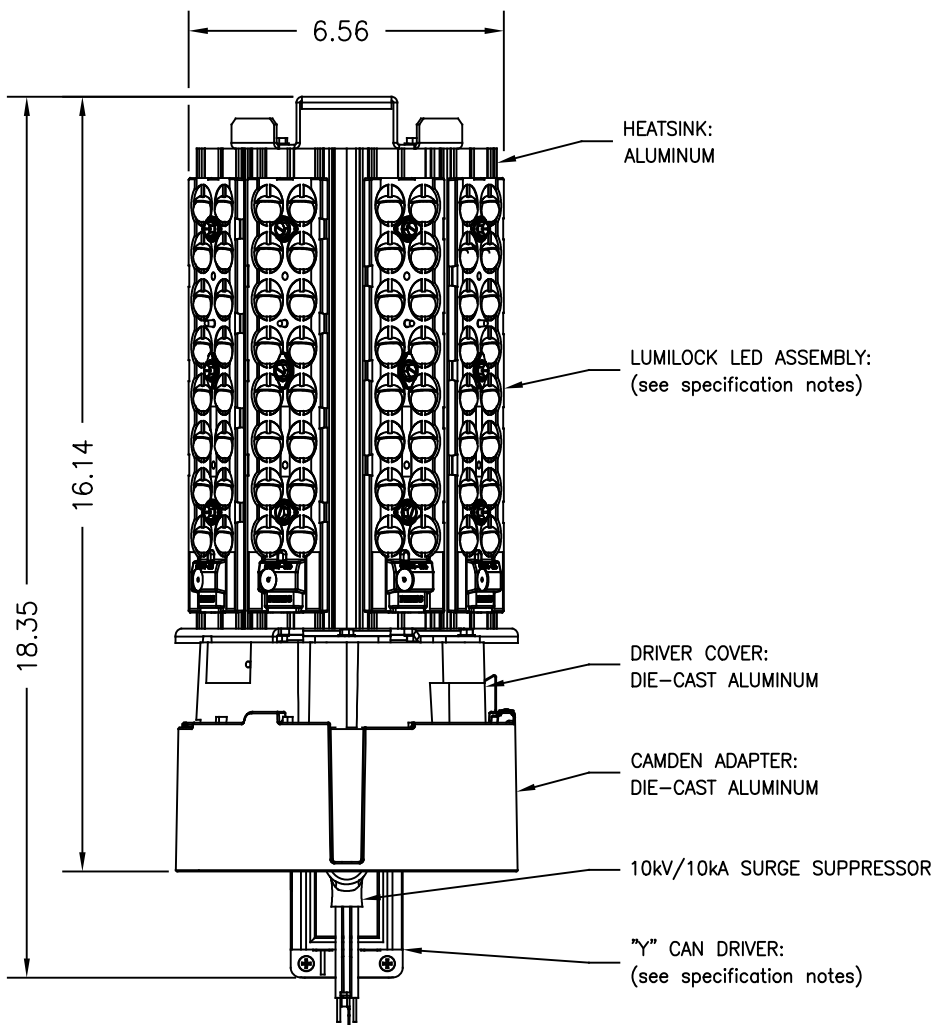

CONFIDENTIAL:

This drawing is confidential and proprietary to Hadco and may not be reproduced without the express written consent of Hadco. Any use hereof or of any of the information or detail herein shall be for the sole benefit of Hadco.

NOTICE:

This drawing is for reference only. Check for latest revision prior to ordering.

PRODUCT APPROVALS

HADCO

MDS

CUSTOMER

100 Craftway Drive
Littlestown, Pa 17340
Phone 800-937-5483
Fax 717-359-0618
www.signify.com

HADCO

JOB NAME:

NOVEC

SCALE:

1:4

DATE:

02/08/23

DRAWN BY:

SMK

DRAWING NUMBER:

S7566-DWG23

REP:

DePorter, Dominick

REV:

C

PCN:

25-006

BY:

SMK

DATE:

06/03/25