

NS ONE-net – 2016

1 Gigabit to 25 Gigabit Passive Optical Multiplexer



Patented 25 Gigabit Single Fiber Bidirectional 16 Channel DWDM Drop and Insert Multiplexing for Metro and Data Center applications

Features Overview

- Compact 1RU (1.75") 19" rack architecture
- Up to 25 Gigabit add/drop multiplexing in one unit
- ITU and IEEE standard compliance
- 100% passive, no power required
- Single fiber technology cuts fiber cost by 50%
- Transports per circuit at 50/100GHz per channel bandwidth
- 8 Full Duplex outputs on one fiber strand, 16 Full Duplex outputs on one fiber pair
- Supports diverse routing for fiber protection
- Supports both Ring and Point-to-Point topologies
- Standard LC/UPC or APC connectors
- Industry standard compliance
- TAA Compliant model available


25 Gigabit Single Fiber Solution


The NS ONE-net family line of products consists of the model **NS ONE-net – 2016**, which provides 16 Dense Wave Division Multiplexing C-band channels on a single fiber and in a passive optical add/drop design for use in the local, metro or core access markets requiring up to 25 Gigabits of bandwidth. NS Telecomm patented “One Fiber” design allows diverse routing of mission critical circuits while adhering to International Telecommunications Union (ITU) and Institute of Electrical and Electronics Engineers (IEEE) standards.

The NS ONE-net is designed to use only one rack unit (1RU) of height in a 19" rack for simple efficient installation. The NS ONE-net provides the greatest density of DWDM channels in a compact 1RU “Plug and play” chassis.

The NS ONE-net provides the highest cost savings for network and data center designers by employing a single strand of fiber per 16 channels of full duplex DWDM bandwidth.

The NS ONE-net supports diverse routing for ring or point-to-point configurations to protect against unexpected fiber cuts.

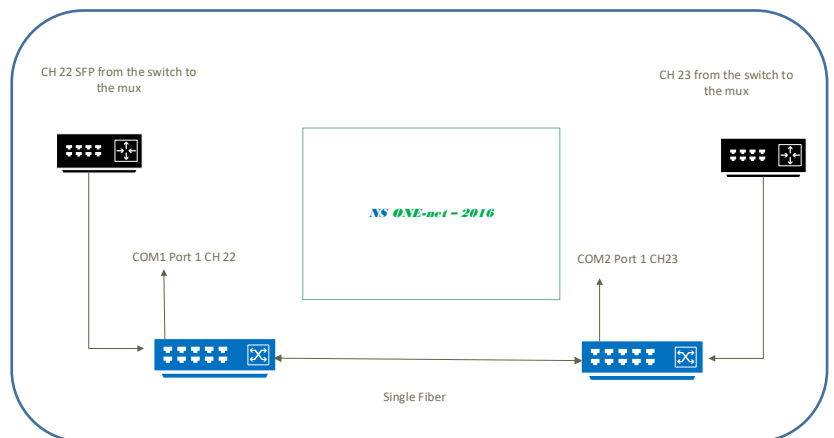

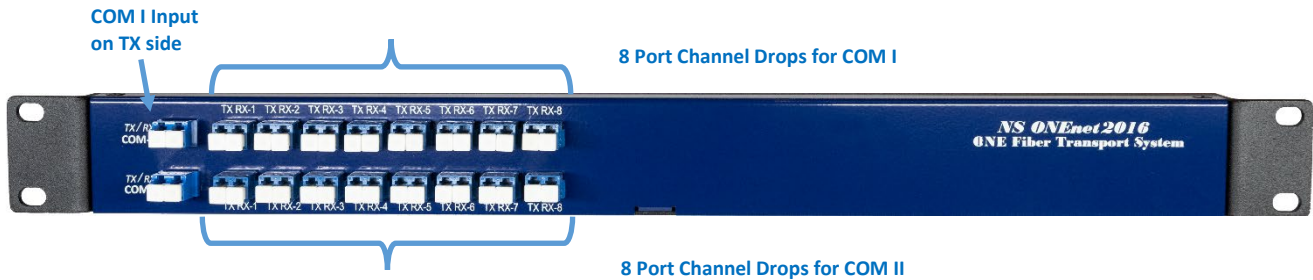

NS ONE-net Channel Listing:

Common Channel	Port Channel	Transmit Channel	Transmit Frequency	Receive Channel	Receive Frequency
COM-I	1	22	1559.79	23	1558.98
COM-I	2	24	1558.17	25	1557.36
COM-I	3	26	1556.55	27	1555.75
COM-I	4	28	1554.94	29	1554.13
COM-I	5	30	1553.33	31	1552.52
COM-I	6	32	1551.72	33	1550.92
COM-I	7	34	1550.12	35	1549.32
COM-I	8	36	1548.51	37	1547.72
COM-I	9	38	1546.92	39	1546.12
COM-I	10	40	1545.32	41	1544.53
COM-I	11	42	1543.73	43	1542.94
COM-I	12	44	1542.14	45	1541.35
COM-I	13	46	1540.56	47	1539.77
COM-I	14	48	1538.98	49	1538.19
COM-I	15	50	1537.40	51	1536.61
COM-I	16	52	1535.82	53	1535.04
COM-I	17	54	1534.25	55	1533.47
COM-I	18	56	1532.68	57	1531.90
COM-I	19	58	1531.12	59	1530.33
COM-I	20	60	1529.55	61	1528.77
COM-II	1	23	1558.98	22	1559.79
COM-II	2	25	1557.36	24	1558.17
COM-II	3	27	1555.75	26	1556.55
COM-II	4	29	1554.13	28	1554.94
COM-II	5	31	1552.52	30	1553.33
COM-II	6	33	1550.92	32	1551.72
COM-II	7	35	1549.32	34	1550.12
COM-II	8	37	1547.72	36	1548.51
COM-II	9	39	1546.12	38	1546.92
COM-II	10	41	1544.53	40	1545.32
COM-II	11	43	1542.94	42	1543.73
COM-II	12	45	1541.35	44	1542.14
COM-II	13	47	1539.77	46	1540.56
COM-II	14	49	1538.19	48	1538.98
COM-II	15	51	1536.61	50	1537.40
COM-II	16	53	1535.04	52	1535.82
COM-II	17	55	1533.47	54	1534.25
COM-II	18	57	1531.90	56	1532.68
COM-II	19	59	1530.33	58	1531.12
COM-II	20	61	1528.77	60	1529.55

SPECIFICATIONS:

Parameter	Description	Specification	Unit
Operating Wavelength	16 Port Channel Drops (DWDM)	1547.72 – 1559.79	Nanometer (nm)
ITU Channel Number	Port Channel Assignment (DWDM)	22-37	
Channel Spacing	ITU Standard 100GHz Grid	100/200	GigaHertz (GHz)
Bandwidth	Per Port Channel Drop	+0.11	Nanometer (nm)
Insertion Loss	Per Port Channel Drop	3.2 Typical, 5.0 Maximum	Decibels (dB)
Ripple	Per Port Channel Drop	≤0.5	Decibels (dB)
Polarization Dependent Loss	Per Port Channel Drop	≤0.25	Decibels (dB)
Adjacent Channel Isolation	Per Port Channel Drop	≥25	Decibels (dB)
Non-adjacent Channel Isolation	Per Port Channel Drop	≥45	Decibels (dB)
Directivity	Per Port Channel Drop	≥50	Decibels (dB)
Return Loss	Per Port Channel Drop	≥45	Decibels (dB)
Operating Temperature Range	Per Unit	-5 ~ +75	Degrees Celsius (°C)
Operating Relative Humidity	Per Unit	85% Maximum, non-condensing	
Storage Temperature Range	Per Unit	-40 ~ +85	Degrees Celsius (°C)
Storage Relative Humidity	Per Unit	5 ~ 95% Maximum, non-condensing	
Size	Height x Width x Length	1.75 x 19 x 12	Inches (in)
Weight	Per Unit	8.75	Pounds (lbs)
Warranty	Mux Warranty	3 Years	

Note: All per port channel drop data does not include connectors.

ORDERING INFORMATION:

Model Name	Description	Ordering Number
NS ONE-net 2016	Single fiber bidirectional inputs (COM I & II) to 16 Port Channels DWDM Multiplexer	NS1R19MXBL20162237
NS ONE-net 2016 TAA	Single fiber bidirectional inputs (COM I & II) to 16 Port Channels DWDM Multiplexer	NS1R19MXBL20162238

NS ONE-net - 2016

8 Ports Com I / 8 Ports Com II



NS Telecomm
10323 Lomond Drive
Manassas, VA 20109-3113, USA

Main: 703-392-1695
Fax: 703-392-1784

Website: www.nstelecomm.com
Email: nstelecomm@novec.com